


## MyOwn Telco: X-Lite Installation Guide

Here follows the installation steps for the X-Lite softphone software to connect onto the [MyOwn Telco](http://myowntelco.net) platform. By following this procedure you will be able to make and receive calls using the phone number you have chosen (see list of cities at: <http://myowntelco.net/canada-voip-did-numbers.php>) for your JaFone account.


- 1) Download **X-Lite** from the following link: <http://www.counterpath.com/x-lite-download.html>
- 2) Start the installation process by executing the downloaded archive and click **Next** on the first screen;




- 3) Accept the terms and click on the **Next** button;

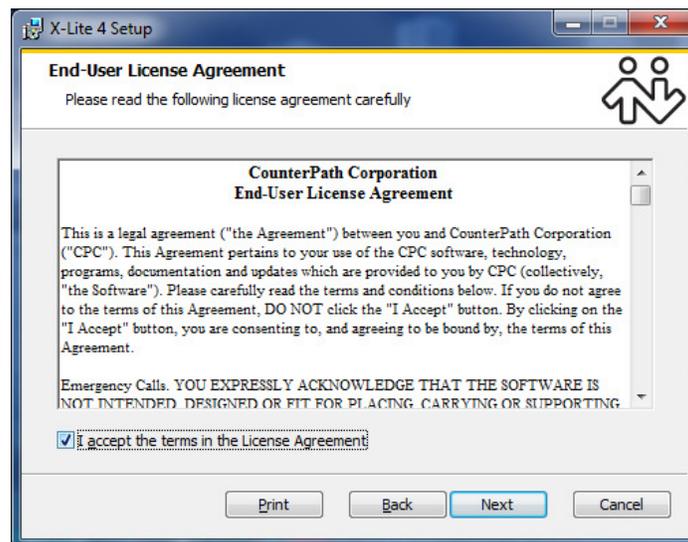


4) Specify the destination folder where you want the software to be installed and click **Next**;

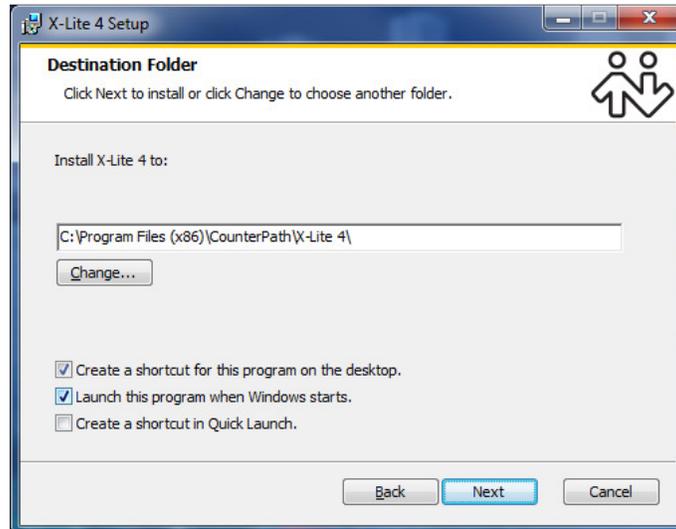


5) Click **Install** on the following screen to start the installation;

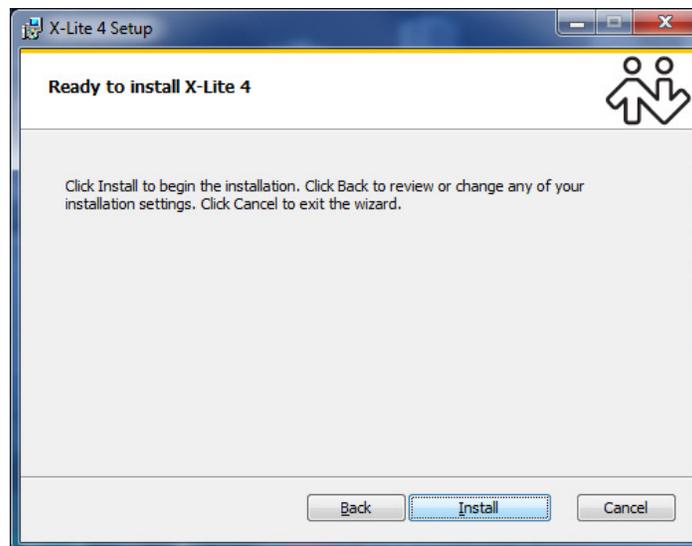


6) The next screen will show you the installation progress; just wait until it is finished and click on **Next**;

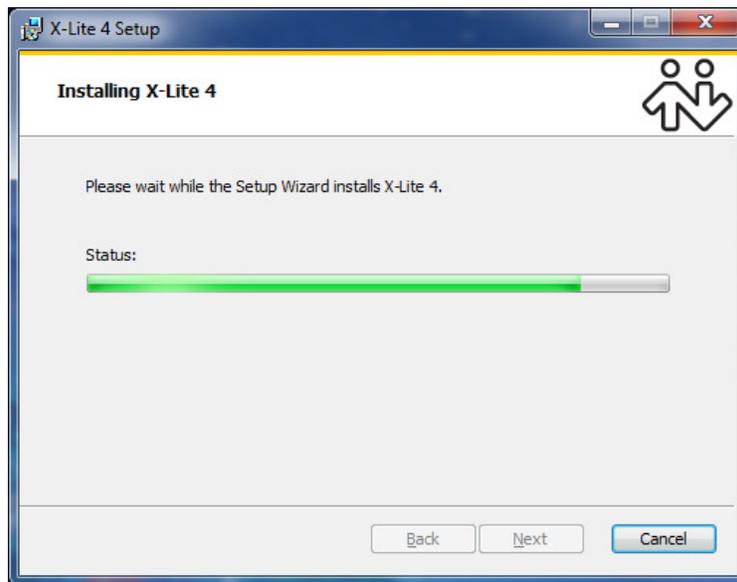


7) Once the installation is completed, click on the **Finish** button to automatically start X-Lite;

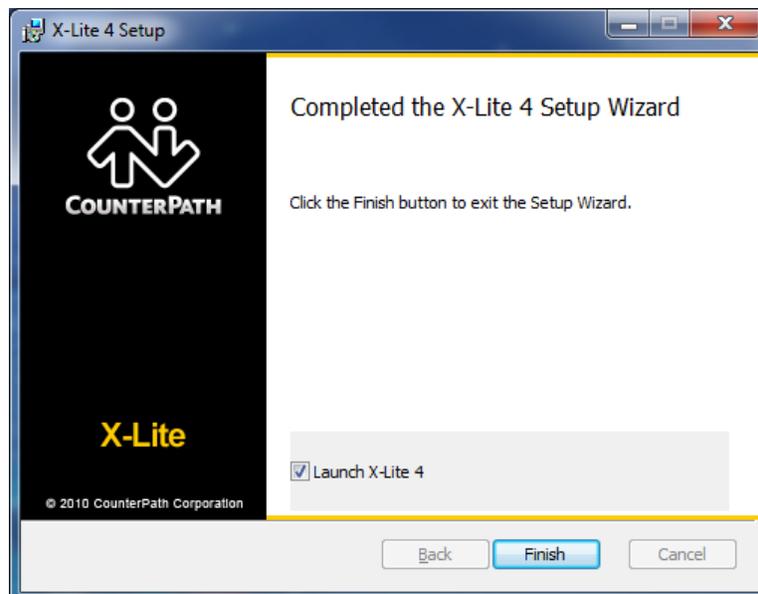

8) When X-Lite is finally started, select **Account Settings** from the menu;

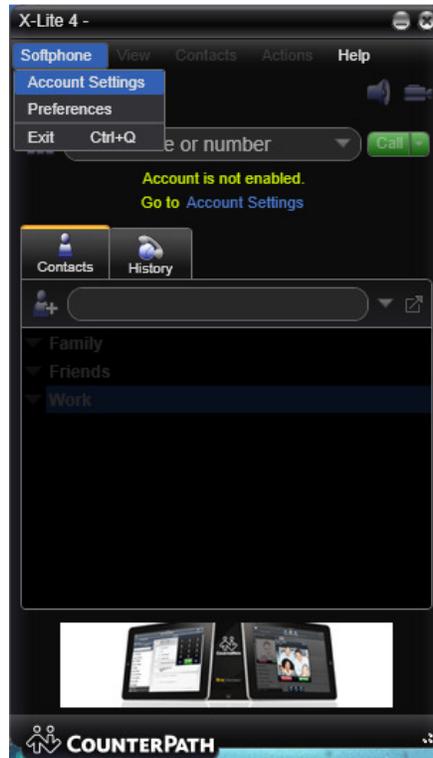


9) In the **Account** tab you will have to put your credentials; put your name in the **Account name** and **Display name** fields, put your 6 digits MyOwn Telco username in the **User ID** field and your 6 digits password in the **Password** field. If you don't already have a username and password, you can create one for free here: <http://myowntelco.net/your-account.php>. You also need to put the proxy name that was given to you when you first registered your account, e.g. *sip.myowntelco.net*, into the **Domain** field;

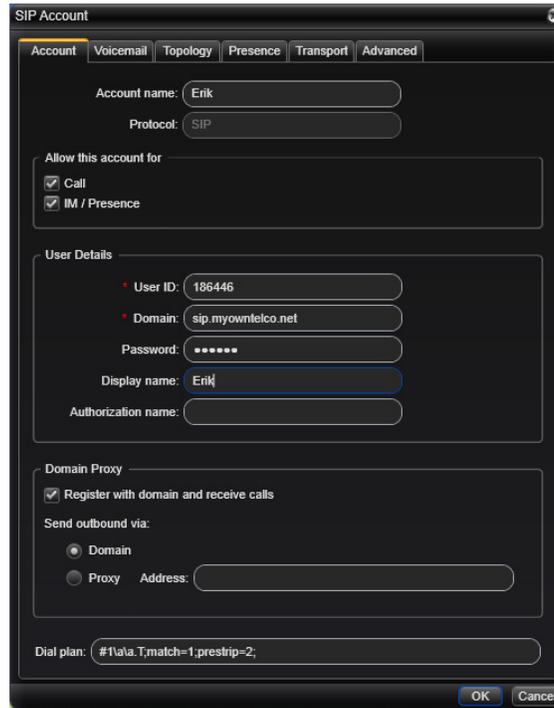

The screenshot shows the 'SIP Account' configuration window with the 'Account' tab selected. The fields are filled as follows:

- Account name: Erik
- Protocol: SIP
- Allow this account for:
  - Call
  - IM / Presence
- User Details:
  - User ID: 186446
  - Domain: sip.myowntelco.net
  - Password: [masked]
  - Display name: Erik
  - Authorization name: [empty]
- Domain Proxy:
  - Register with domain and receive calls
  - Send outbound via:
    - Domain
    - Proxy Address: [empty]
- Dial plan: #1!ala.T;match=1;prestrip=2;


10) Now click on the **Voicemail** tab and select the **Check for voicemail** option and put 9998 in the **Number to dial for checking voicemail** field;

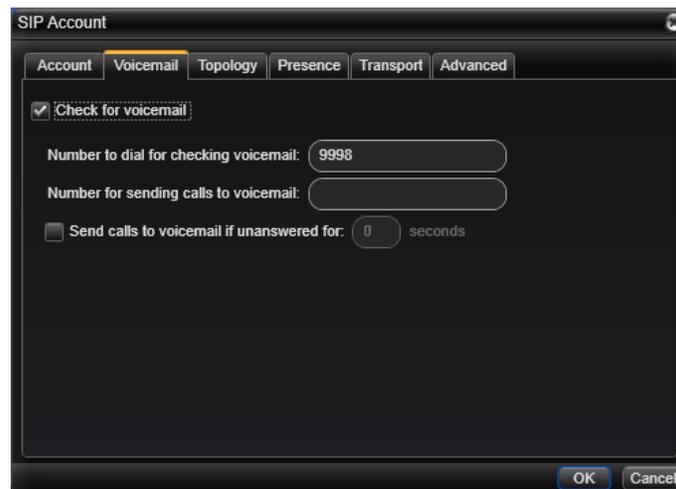


The screenshot shows the 'SIP Account' configuration window with the 'Voicemail' tab selected. The fields are filled as follows:

- Check for voicemail
- Number to dial for checking voicemail: 9998
- Number for sending calls to voicemail: [empty]
- Send calls to voicemail if unanswered for: 0 seconds

11) Once your account is configured, select the **Preferences** menu item;

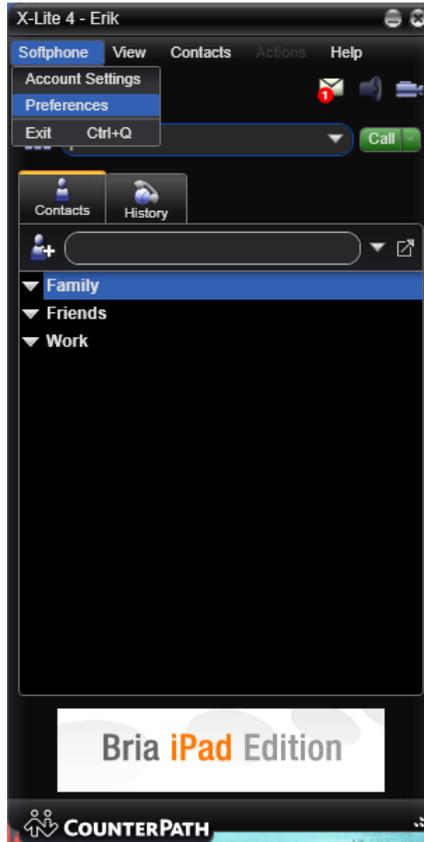


12) Click on the **Devices** section and verify your Headset, Microphone and Speakerphone configurations;

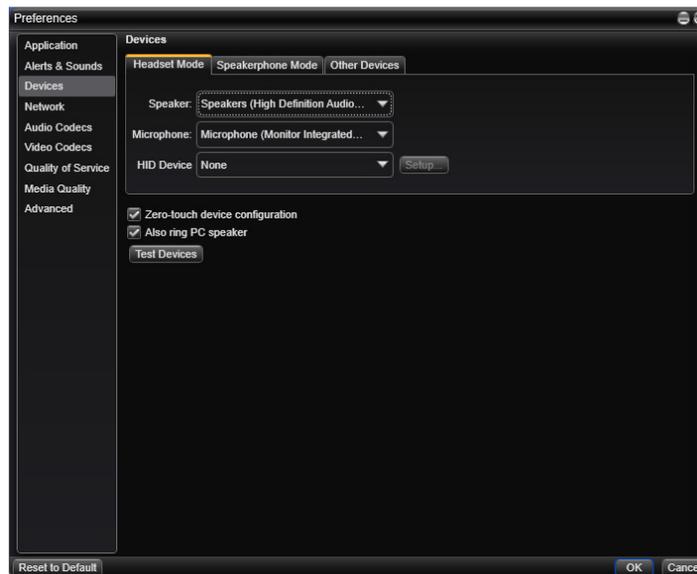

**13)** Now, select the **Audio Codecs** section and unselect all codecs so that only the **uLaw** codec is left in the list. Click **OK** when you are done;



**14)** You are now all configured, just input a phone number and click on the green **Call** button to initiate the call;

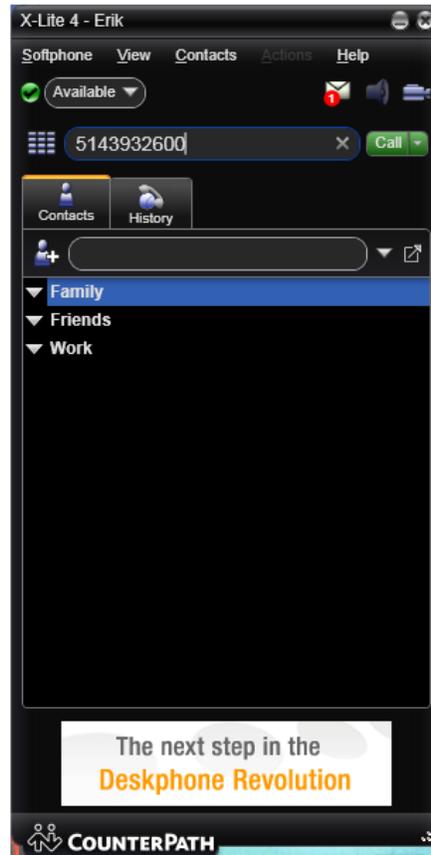

For more information on how to use and configure the X-Lite softphone software, please consult the official X-Lite knowledge base at the following link:

<http://www.counterpath.com/support.html>

If you wish to have a phone number associated to your X-Lite software, please have a look at [MyOwn Telco](http://myowntelco.net/canada-voip-did-numbers.php)'s list of cities here: <http://myowntelco.net/canada-voip-did-numbers.php>